




SPECIFICATIONS	Model	150B415	B-series								
			15kW, 3-phase								
<p>Type of Pump Submersible cast iron pump suitable for pumping sewage, wastewater, storm water, etc.</p> <p>Type of Fluid Sewage, wastewater, and water carrying solid matters</p> <p>Temperature: 0 to 40°C (High temperature model available on special request)</p> <p>Discharge Bore 150mm</p> <p>Motor Output 15kW</p> <p>Power Supply Three-phase</p> <p>Starting Method Star-Delta</p> <p>Motor Continuous-duty rated, dry-type induction motor</p> <p>Insulation Class: F Degree of Protection: IP68</p> <p>No. of Poles & Speed (Synchronous Speed) 4-pole, 1500/1800min⁻¹ (50/60Hz)</p> <p>Power Supply Voltages & Rated Currents</p> <table><tr><td>50Hz</td><td>60Hz</td></tr><tr><td>380V – 32.6A</td><td>220V – 54.6A</td></tr><tr><td>400V – 31.9A</td><td>380V – 30.7A</td></tr><tr><td>415V – 31.2A</td><td>440V – 27.2A</td></tr></table> <p>Power Cable Sheath: Chloroprene rubber Standard Length: 8m 200 to 600V supply: 1 × 4 × 5.5mm², O.D. 16.8mm 1 × 3 × 5.5mm², O.D. 15.2mm 1 × 2 × 1.25mm², O.D. 9.8mm</p> <p>Dry Weight (excluding cable) Free Standing Type: 270kg Guide Rail Fitting Type: 240kg</p>		50Hz	60Hz	380V – 32.6A	220V – 54.6A	400V – 31.9A	380V – 30.7A	415V – 31.2A	440V – 27.2A	<p>Impeller Shrouded two-channel impeller for solid-handling design, dynamically balanced</p> <p>Solids Passage 50Hz – ϕ75mm 60Hz – ϕ75mm</p> <p>Cable Entry with Anti-Wicking Block Watertight cable entry with strain-relief device. The anti-wicking block prevents water incursion due to capillary action should the power cable be damaged or the end submerged.</p> <p>Bearings Permanently lubricated, deep-groove, double-shielded C3 ball bearings</p> <p>Shaft 420 stainless steel</p> <p>Shaft Seal (Mechanical Seal) Furnished with a double-face mechanical seal located in oil chamber. Both upper and lower seal faces always run in a clean environment.</p> <p>Upper Seal Faces: SiC + SiC Lower Seal Faces: SiC + SiC</p> <p>Oil Seal (Lip Seal) Used as a “Dust Seal”, it protects the mechanical seal from abrasive particles.</p> <p>OIL LIFTER (Patented) Equipped in oil chamber. It forcibly supplies lubricating oil to the mechanical seal and continues to supply the oil to the upper seal faces even if lubricant falls below the rated volume.</p> <p>Type of Lubricating Oil & Volume Turbine Oil (ISO VG32), 4800ml</p> <p>Motor Protection Device A miniature thermal protector is embedded in each winding of the motor. Should excessive heat builds up, the bimetal strip opens to cause the control panel to shut the power supply.</p>	
50Hz	60Hz										
380V – 32.6A	220V – 54.6A										
400V – 31.9A	380V – 30.7A										
415V – 31.2A	440V – 27.2A										
<p>Optional Accessories</p> <table><tr><td><p>Bend Set (Free Standing Type)</p><ul style="list-style-type: none">• Discharge Bend• JIS 10kg/cm² Screwed Flange<p>Stand Set (Free Standing Type)</p><ul style="list-style-type: none">• Stand</td><td><p>TOS Set (Guide Rail Fitting Type)</p><ul style="list-style-type: none">• Duckfoot Bend• Guide Support• Guide Hook• Lifting Chain 5m (with Shackles)• JIS 10kg/cm² Screwed Flange<p>External Leakage Sensor</p></td></tr></table>				<p>Bend Set (Free Standing Type)</p> <ul style="list-style-type: none">• Discharge Bend• JIS 10kg/cm² Screwed Flange <p>Stand Set (Free Standing Type)</p> <ul style="list-style-type: none">• Stand	<p>TOS Set (Guide Rail Fitting Type)</p> <ul style="list-style-type: none">• Duckfoot Bend• Guide Support• Guide Hook• Lifting Chain 5m (with Shackles)• JIS 10kg/cm² Screwed Flange <p>External Leakage Sensor</p>						
<p>Bend Set (Free Standing Type)</p> <ul style="list-style-type: none">• Discharge Bend• JIS 10kg/cm² Screwed Flange <p>Stand Set (Free Standing Type)</p> <ul style="list-style-type: none">• Stand	<p>TOS Set (Guide Rail Fitting Type)</p> <ul style="list-style-type: none">• Duckfoot Bend• Guide Support• Guide Hook• Lifting Chain 5m (with Shackles)• JIS 10kg/cm² Screwed Flange <p>External Leakage Sensor</p>										
TSURUMI MANUFACTURING CO., LTD.											

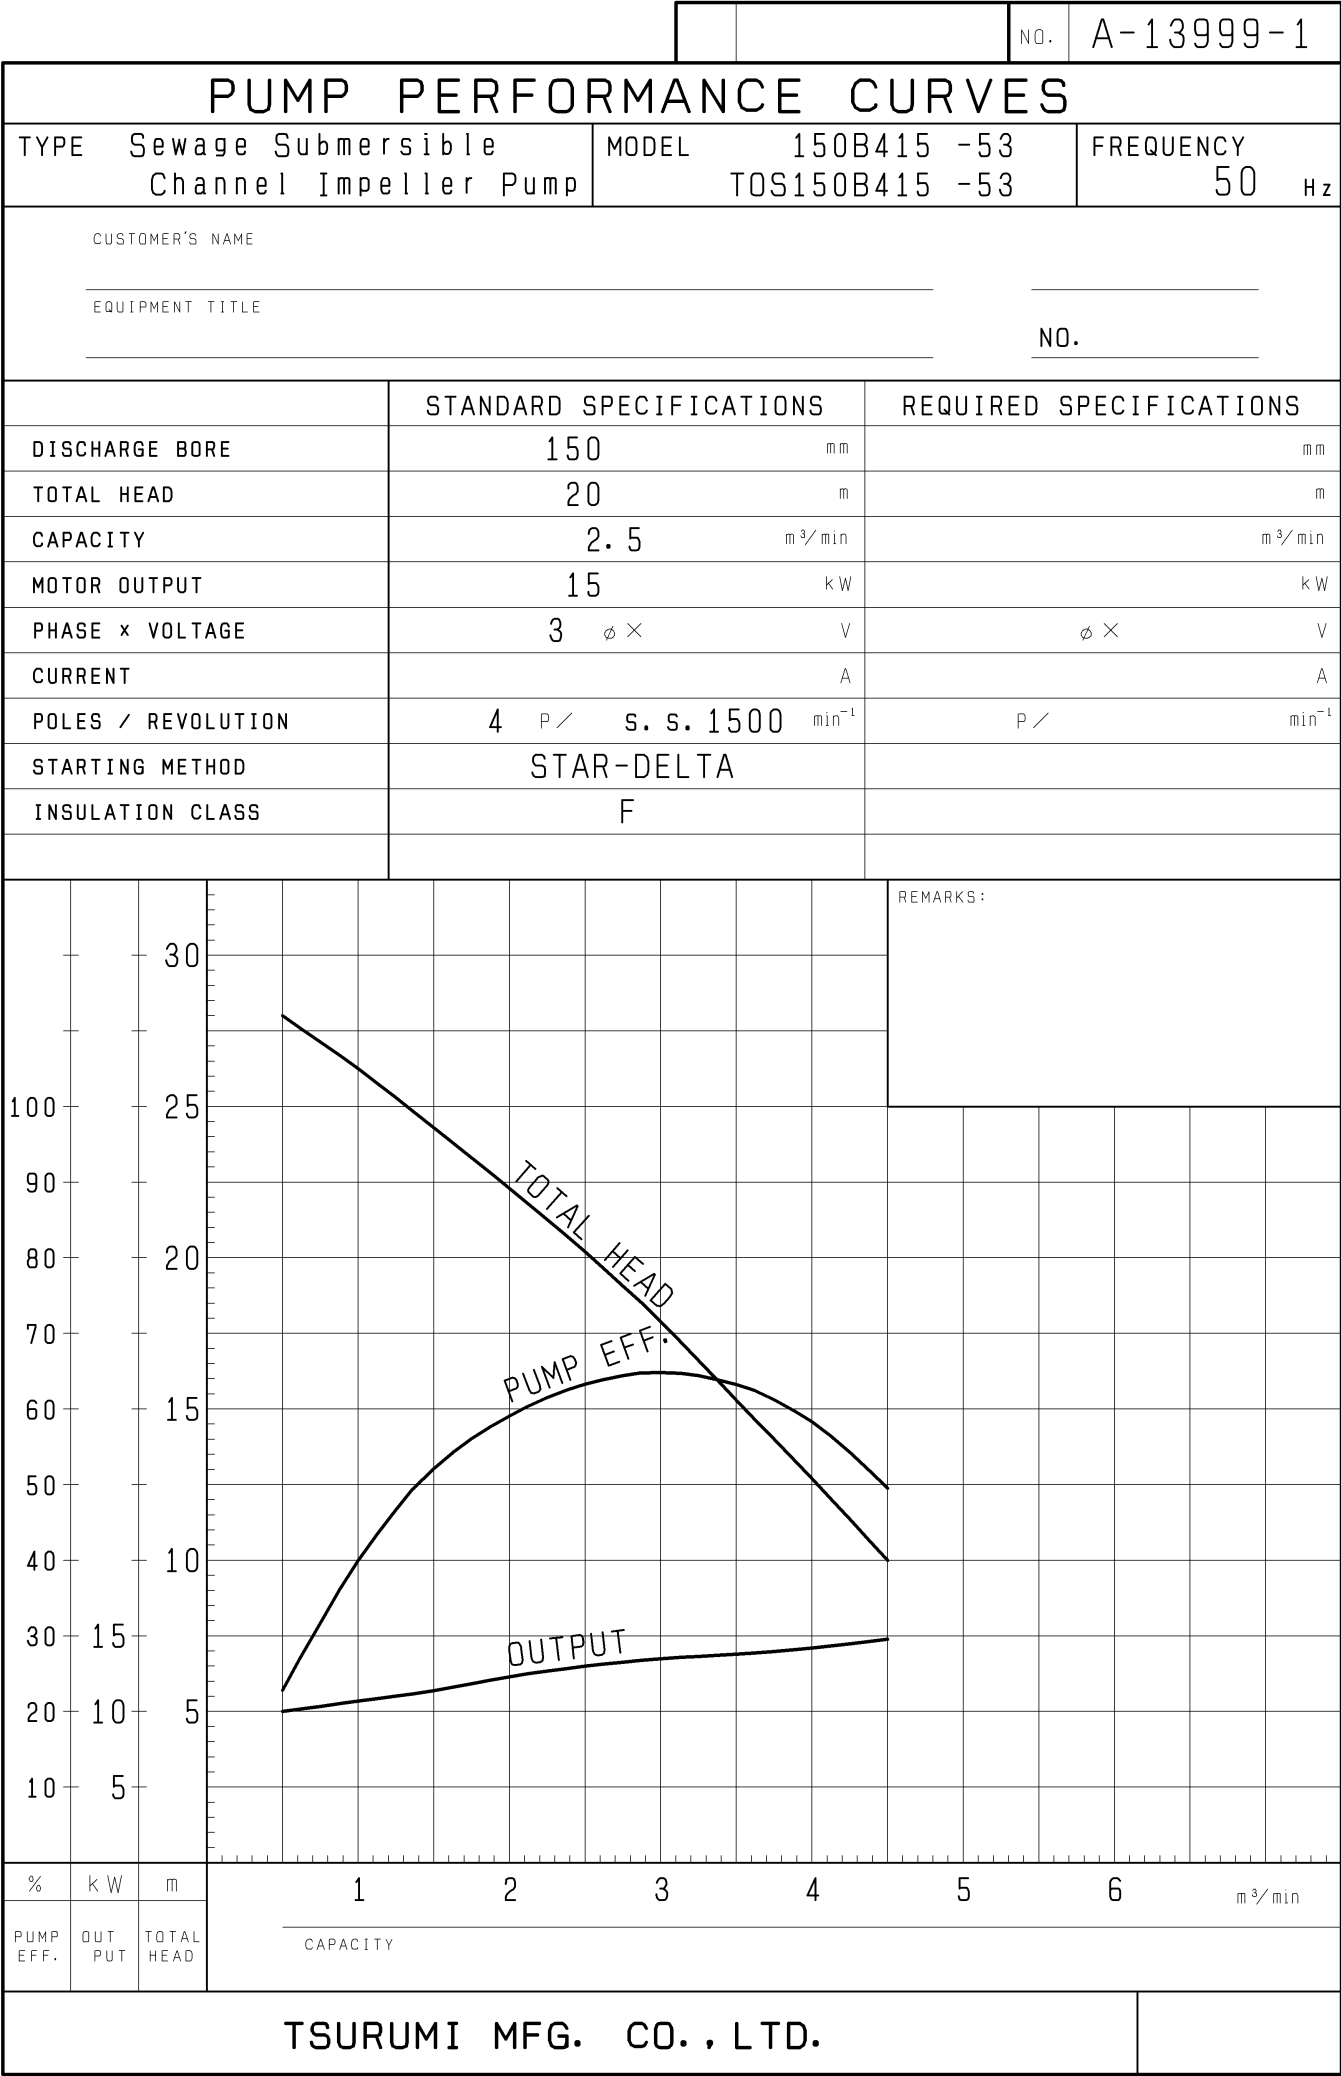

DIMENSION DRAWING			No.	No.	A-14011-1
TYPE	Sewage Submersible Channel Impeller Pump		MODEL	150B415 -53/63	


Approximate Weight(※)
270kg

※excluding cable

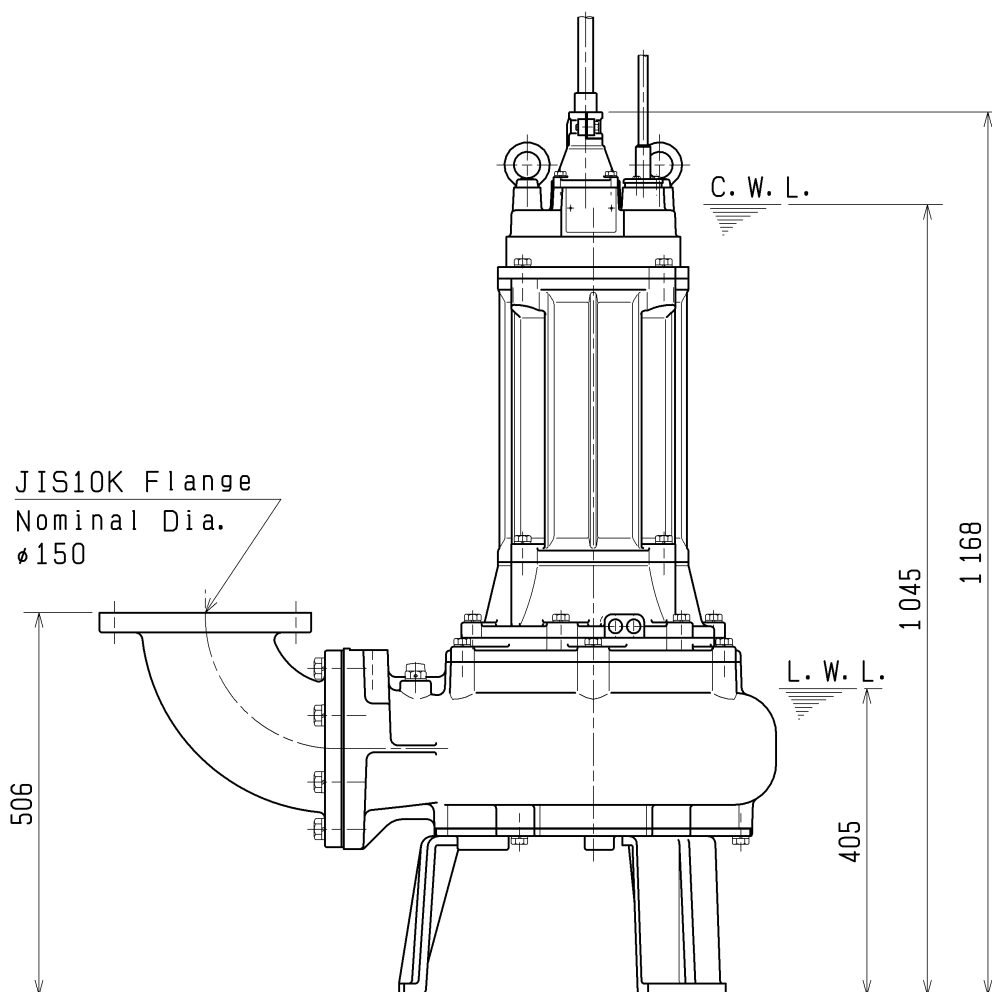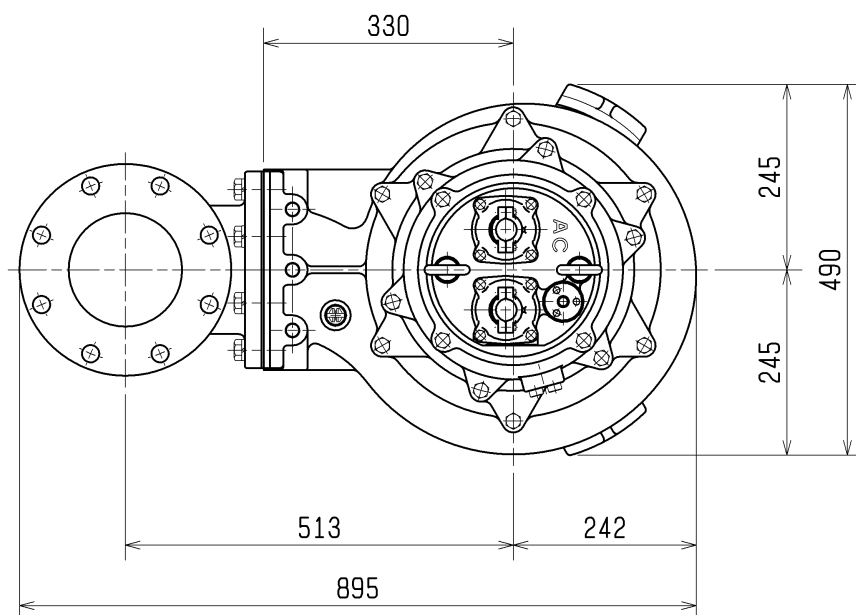

C. W. L. :Continuous Running Water Level
L. W. L. :Lowest Running Water Level

SECTIONAL DRAWING			No.		No.	A-14018-1
TYPE	Sewage Submersible Channel Impeller Pump		MODEL	150B415 -53/63		

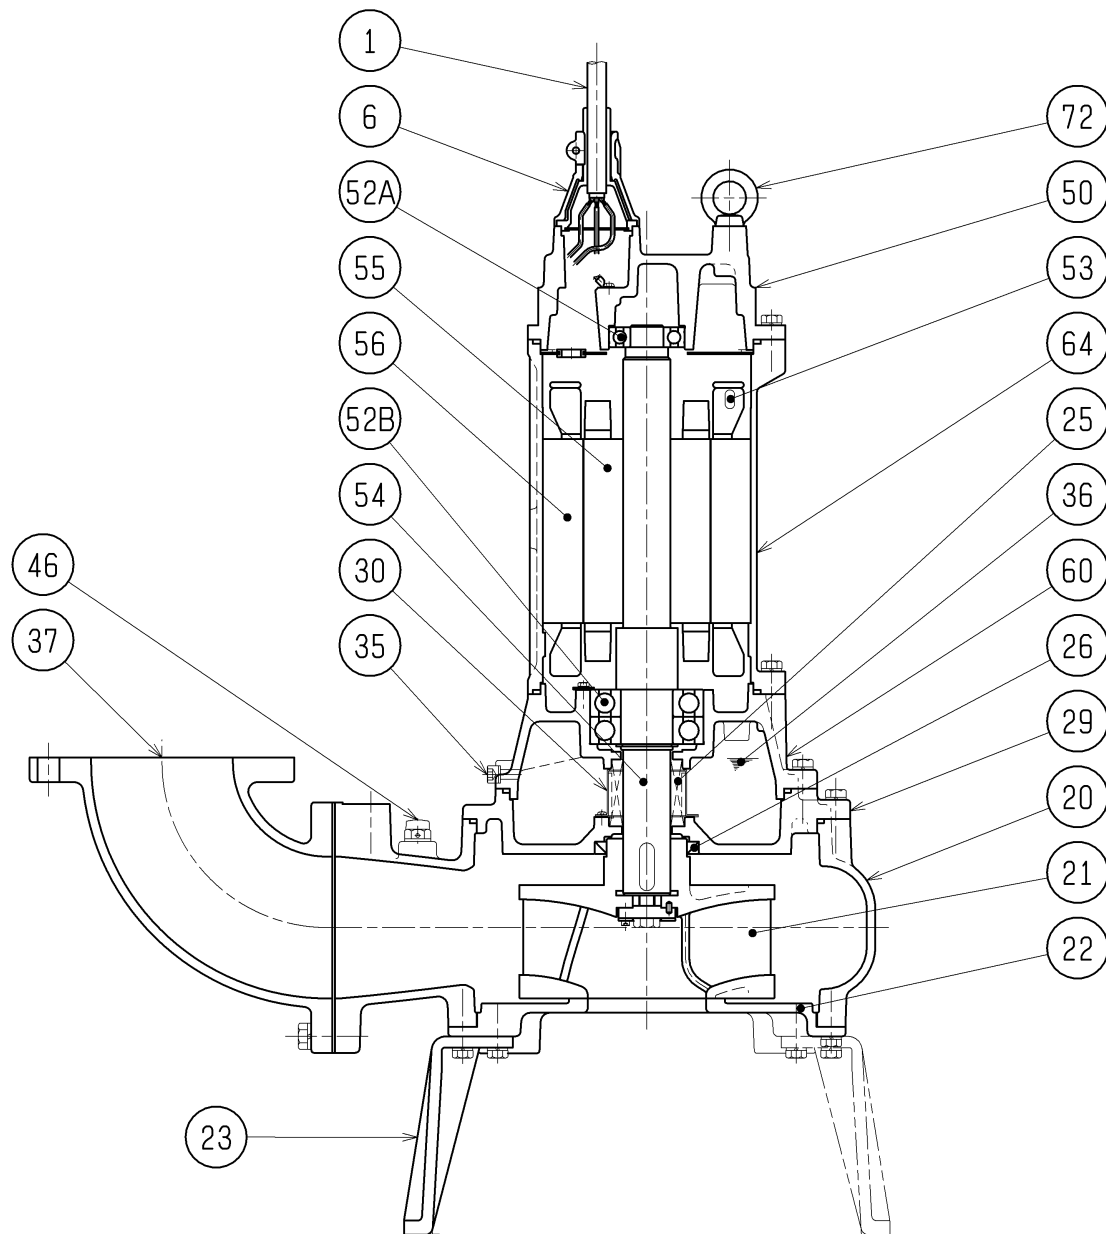

REQ. SPECIFICATION

No.	DESCRIPTION	Q'TY	MATERIAL / NOTE	No.	DESCRIPTION	Q'TY	MATERIAL / NOTE
1	Cabtyre Cable	3	Chloroprene Sheath	46	Air Release Valve	1	Nylon
6	Stuffing Box	2	Gray Iron Casting	50	Motor Blacket	1	Gray Iron Casting
20	Pump Casing	1	Gray Iron Casting	52A	Upper Bearing	1	6307ZZC3
21	Impeller	1	Gray Iron Casting	52B	Lower Bearing	1	6311ZZD2C3
22	Suction Cover	1	Gray Iron Casting	53	Motor Protector	3	
23	Stand	3	Ductile Iron Casting	54	Shaft	1	Stainless Steel 420J2
25	Mechanical Seal	1	H-50T	55	Rotor	1	
26	Oil Seal	1	TC8511013	56	Stator	1	
29	Oil Casing	1	Gray Iron Casting	60	Bearing Housing	1	Gray Iron Casting
30	Oil Lifter	1	Steel Plate	64	Motor Frame	1	Gray Iron Casting
35	Oil Plug	2	Stainless Steel 304	72	Eye Bolt	2	Structure Steel
36	Lubricant		Turbine Oil (ISO VG32)				
37	Discharge Bend	1	Gray Iron Casting				